


Q-Tee

The Q-Tee tapping saddle is Ideal for creating branches in under pressure water supply networks. Made with the same anti-turn hexagons for the screw heads and open flaps for easy strap attachment as the Slimline, but with a longer neck and the option of a Shut off blade The Q-Tee makes perfect sense for under pressure drilling.



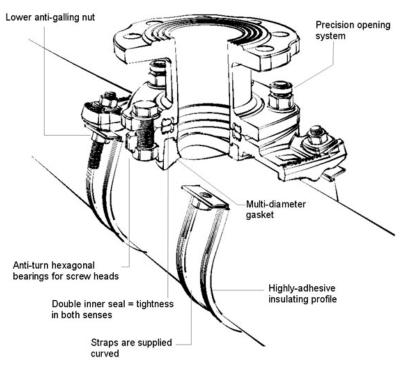

Specifications

- European standard EN 545.
- PN 16 Permissible working pressure (PWP): 16 bar.
- EN-GJS-450-10 ductile iron body and reel.
- Tapping saddle fitted with a multi- diameter tightening seal.
- Epoxy coating WRAS approved for drinking water.
- Coating thickness between 250 and 500 micron.
- EPDM gasket WRAS approved for drinking water.
- Pipe sizes to suit 3" to 12.
- Outlet sizes DN80 and DN100

Go mobile! More products and specs online

