


## **Q-Tee Slimline**

Due to the Q-Tees slim line profile and minimum weight, they can easily replace the simple traditional necked-saddle. With anti-turn hexagons for the screw heads, open flaps for fast strap attachment and included screw set to make insertion easier during installation. The Slimline Q-Tee makes easy under pressure tapping.



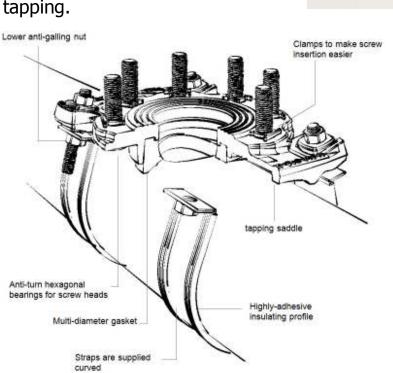

## **Sizes and Specifications**

- European standard EN 545.
- PN 16 Permissible working pressure (PWP): 16 bar.
- EN-GJS-450-10 ductile iron body.
- WRAS approved materials.
- WRAS Gasket.
- Pipe sizes: 3" to 12".
- DN80 and DN100 Flanges.

Go mobile! More products and specs online

